



**FLANGE SKILLETS INTERNATIONAL, LLC**  
8687 W. Irlo Bronson Memorial Hwy  
Suite 200  
Kissimmee, FL 34747  
Phone: (337) 322-2271  
Email: sales@flangeskillets.com

# FULL SKILLET UNPACKING / RIGGING INSTRUCTIONS

Note: Care must be used at all times to protect the sealing surfaces of the gasket. Flange Skillets International, LLC assumes no liability for any damages which may result from the use of our product. User assumes all risks.


**Step 1** Lay the gasket on a hard surface



**Step 2** Place the skillet over the gasket



**Step 3** Tap the skillet to center it on the gasket

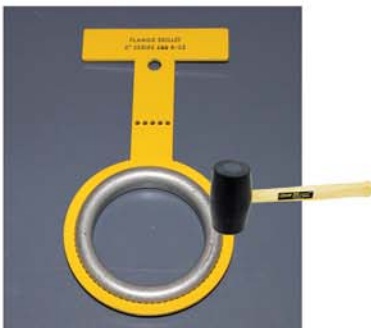

**Step 4** Install the "safety" ties





**FLANGE SKILLET'S INTERNATIONAL, LLC**  
8687 W. Irlo Bronson Memorial Hwy  
Suite 200  
Kissimmee, FL 34747  
Phone: (337) 322-2271  
Email: sales@flangeskillets.com

## **FULL SKILLET USING THE SKILLET**

Note: The Full Skillet is designed to remain in the assembly. Flange Skillets International, LLC assumes no liability for any damages which may result from the use of our product. User assumes all risks.

**Step 1** Install the flange studs and nuts on the lower half of the flange.

**Step 2** Remove the "safety" ties. Inventory.

**Step 3** Lower the Flange Skillet™/ gasket assembly, resting it on the installed studs.

**Step 4** Draw the flanges together. The Flange Skillet™ is self-aligning, so it will seat properly within the ring groove.

**Step 5** Continue with the installation of the remaining studs and nuts, torque to spec.

**Step 6** Break off the "T handle" at the outer edge of the flange for a flush installation. (OPTIONAL)